

医疗电池包


M4S2P14466-MM

MEGMEET

4S2P Battery

电源产品 |

MEGMEET

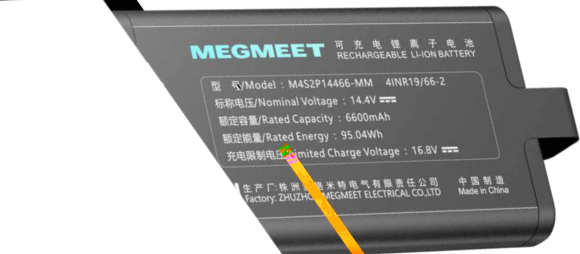

(L x W x H): 23.00mm x 77.7mm x 150.9mm (max.)
: 467g ref



产品详情

18650/3.6V/3400mAh
6600mAh
14.4V
10.4~16.8V
CC-CV 16.8V/1.32A, 0.136A
CC 1.32A 10.4V
16.8V
≤ 200mΩ
3A
<1A
8.5A
500 70%

环境条件

温度范围
0°C to +45°C
-20°C to +60°C
< 1 : -20°C to +50°C
< 3 : -20°C to +45°C
< 1 : -20°C to +20°C

电路框图

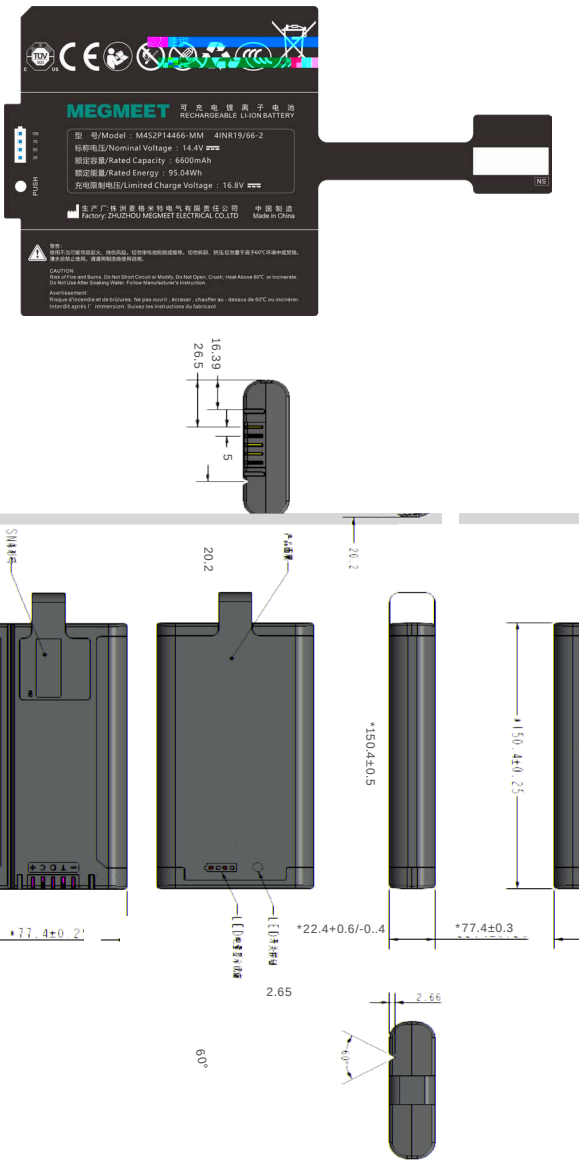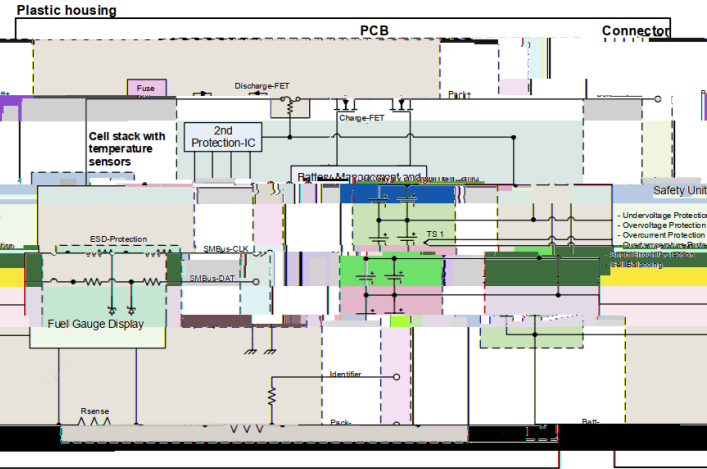

Pin		
1	-	Pack-
2	T	NTC/pres
3	D	SMBUS SDA
4	C	SMBUS SCL
5	+	Pack+

医疗电池包解决方案

MEGMEET 20



医疗电池包

M3S2P10867-MM

3S2P Battery




(L x W x H): 150.24mm x 58.77mm x 22mm (max.)
: 335g ref

18650/3.6V/3400mAh
6700mAh
10.8V
7.8~12.6V
CC-CV 12.6V/1.34A, 0.134A
CC 1.34A 7.8V
12.6V
≤ 200mΩ
4A
<1A
8A
500 70%



环境条件

温度范围	0°C to +45°C
	-20°C to +60°C
	< 1 : -20°C to +50°C
	< 3 : -20°C to +45°C
	< 1 : -20°C to +20°C

功能框图

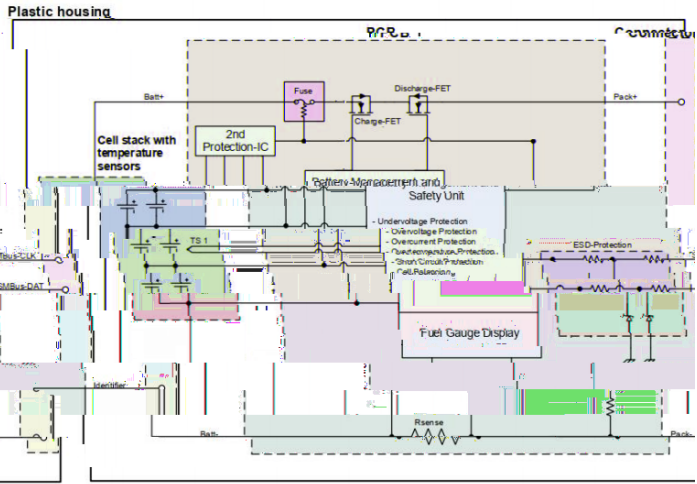

- UN38.3
- IEC62133
- GB 28164
- (EU) 2023/1542

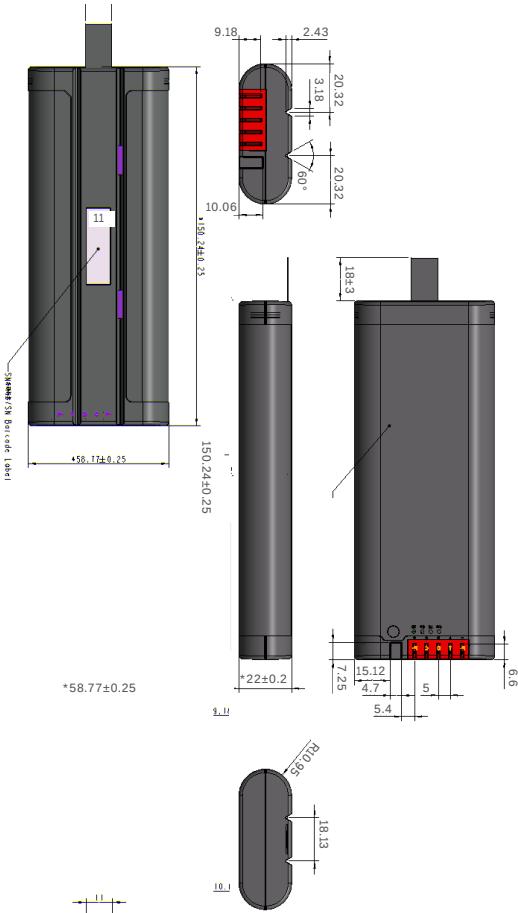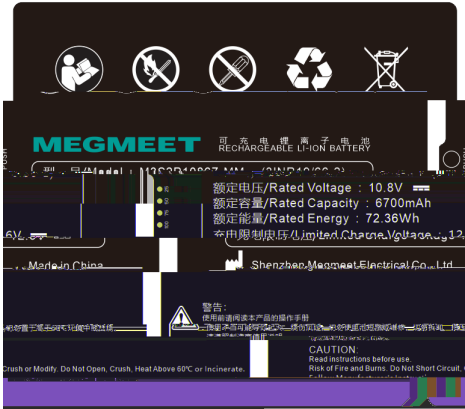

Pin				
	-	Pack-	1	-
	T	NTC/pres	2	T
	D	SMBUS SDA	3	D
	C	SMBUS SCL	4	C
	+	Pack+	5	+

医疗电池包

M4S1P14433-MM

4S1P Battery



(L x W x H): 77.4mm x 85.2mm x 22.4mm (max.)
: 250g ref



产品详情

18650/3.6V/3400mAh
3300mAh
14.4V
10.4~16.8V
CC-CV 16.8V/0.66A, 0.068A
CC 0.66A 10.4V
16.8V
≤ 200mΩ
1.6A
<1A
5A
500 70%

环境条件

温度范围	0°C to +45°C
	-20°C to +60°C
	< 1 : -20°C to +50°C
	< 3 : -20°C to +45°C
	< 1 : -20°C to +20°C

功能框图

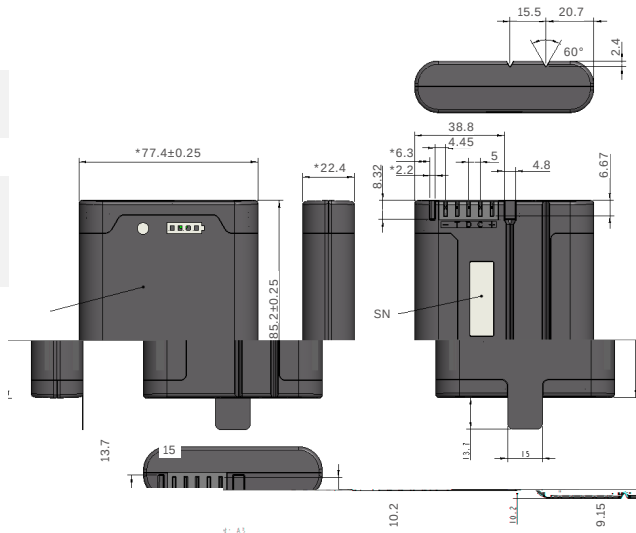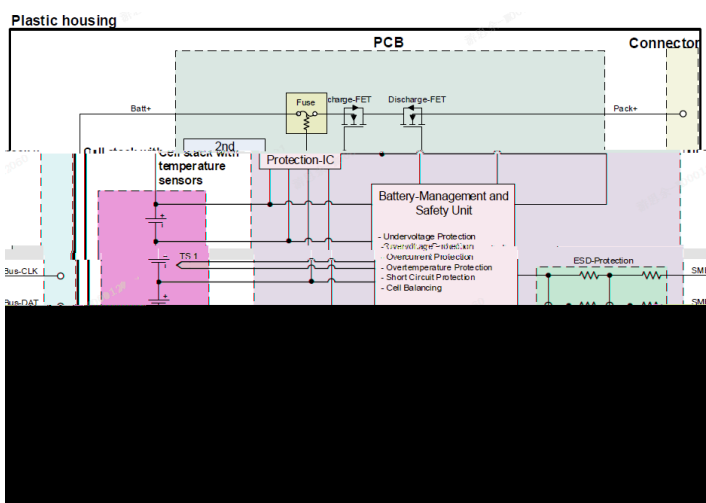

Pin		
1	-	Pack-
2	T	NTC/pres
3	D	SMBUS SDA
4	C	SMBUS SCL
5	+	Pack+